


APC Recommendation after discharge of **\*CARGO\*** for ships equipped with full capacity operational Nitrogen Generator.

**AFTER DISCHARGE**

Nitrogen Purging shall continue until the concentration of hydrocarbon (or other flammable) vapours in the cargo tanks has been reduced to Less than 1% by Volume.

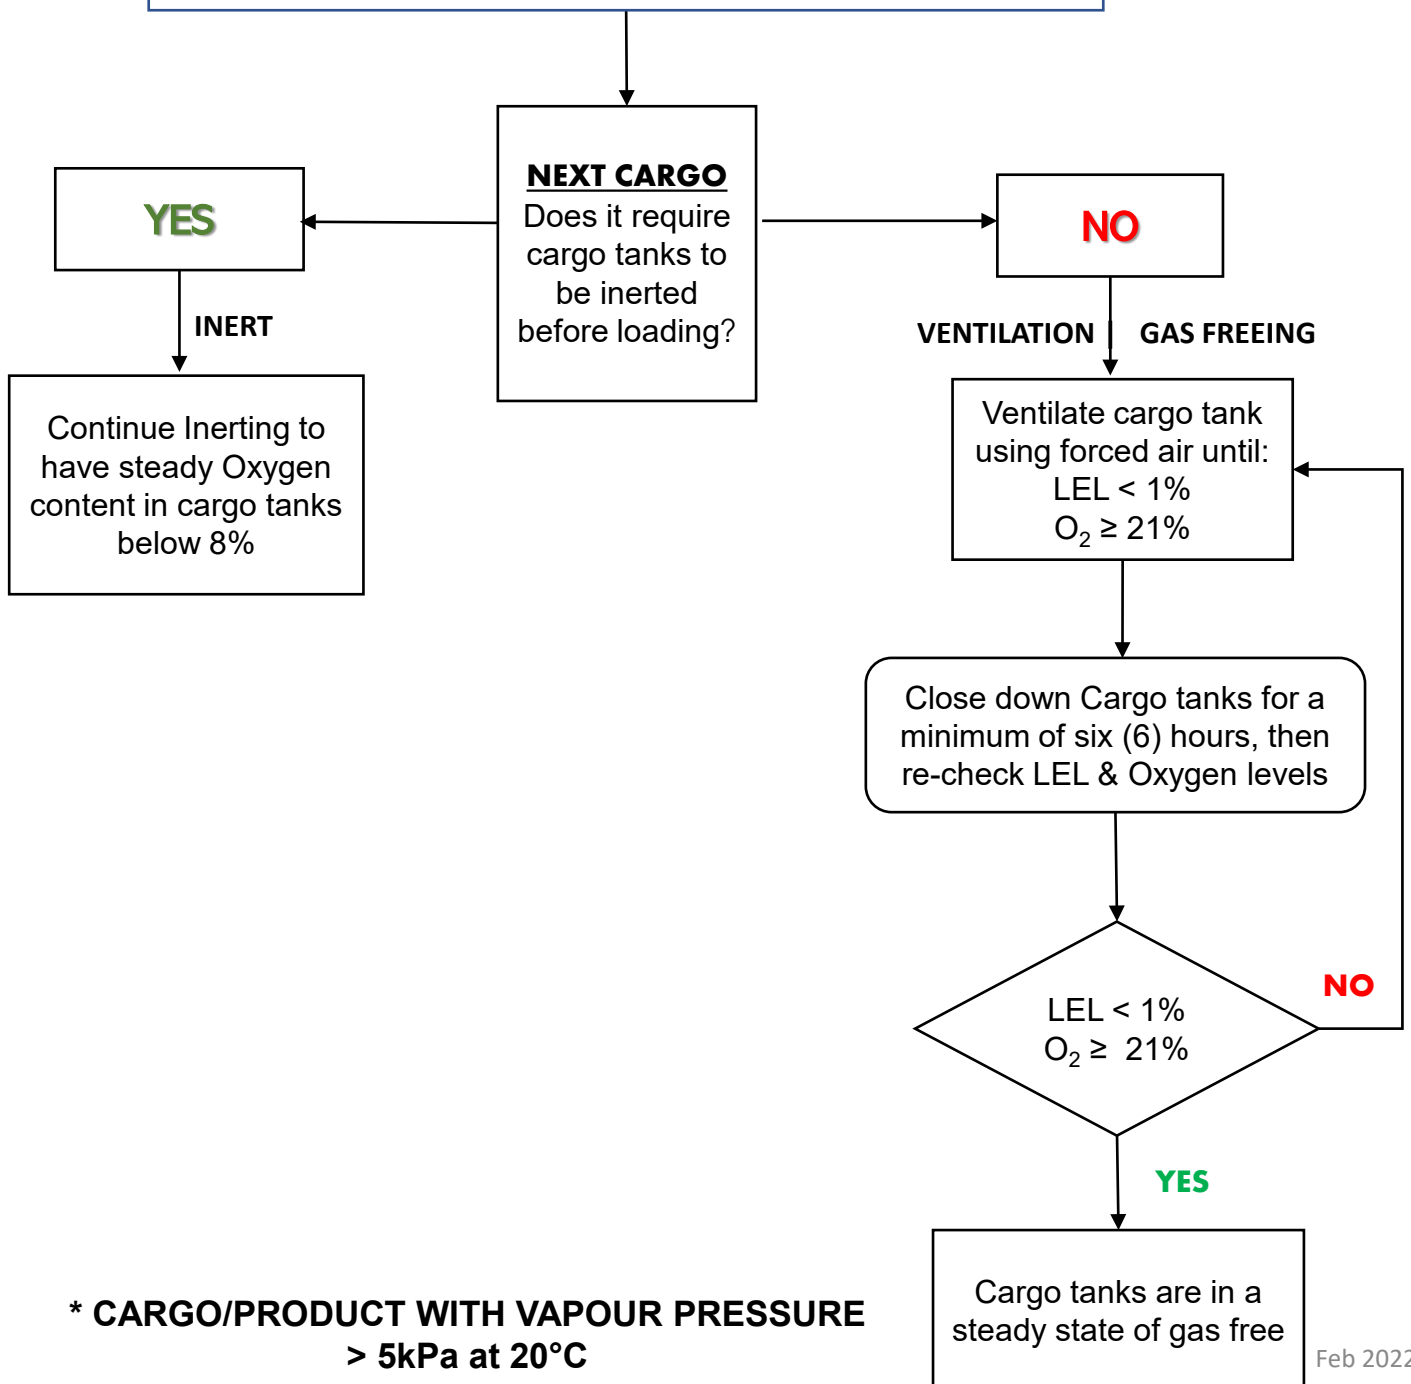

**\* CARGO/PRODUCT WITH VAPOUR PRESSURE > 5kPa at 20°C**