


AFTER DISCHARGE

Nitrogen Purging shall continue until the concentration of hydrocarbon (or other flammable) vapours in the cargo tanks has been reduced to Less than 1% by Volume.

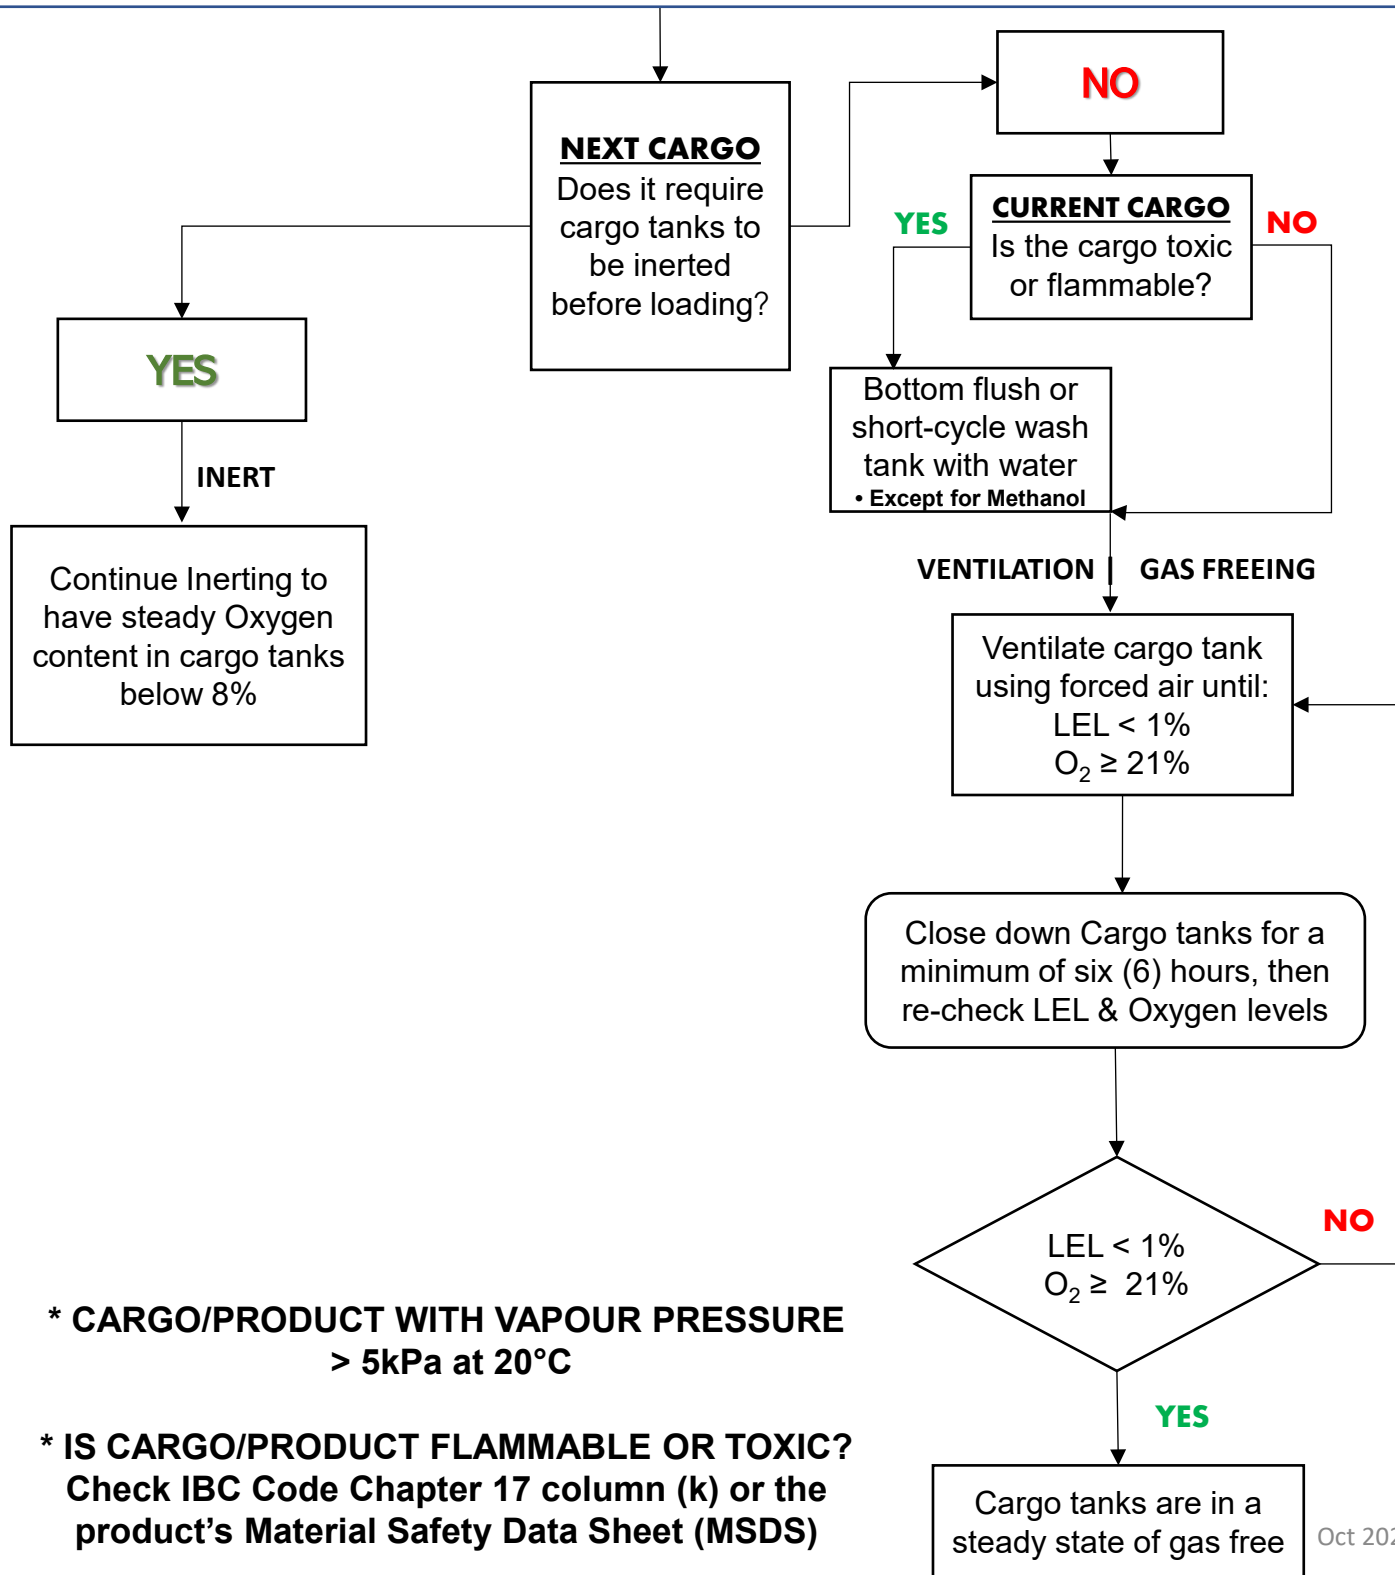

*** CARGO/PRODUCT WITH VAPOUR PRESSURE
> 5kPa at 20°C**

*** IS CARGO/PRODUCT FLAMMABLE OR TOXIC?
Check IBC Code Chapter 17 column (k) or the
product's Material Safety Data Sheet (MSDS)**